



Delta Pack

Ready to install



The performance of our Si-10 with ducting for install next-to the air conditioning unit.

SUITABLE FOR

- Up to 5.5 tons
- Wall mounted units

PERFORMANCE

- 5 gph max. flow
- 33' max. discharge

Delta Pack tech specs

Key features

- Drain safe device
- Easy installation
- Reversible mounting

MAX. FLOW RATE: 5.0 gph

MAX. DISCHARGE HEAD: 33ft; flow rate = 1 gph

MAX. PRESSURE: 46ft; flow rate = 0 gph

SOUND LEVEL AT 3.3FT: 22 dBA according to EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)

POWER SUPPLY: 230 V ~ 50/60 Hz - 14 W (DP10UL02UN23)

INSULATION CLASS: Double Insulation

DETECTION LEVELS: On: ²³/₃₂" • Off: ¹/₂" • Safety: ¹³/₁₆"

SAFETY SWITCH: NC 8A resistive - 250 V

THERMAL PROTECTION: 240°F auto-reset

OPERATING CONDITIONS: 100%: Continuous duty

COVER DIMENSIONS: L 5¹/₈" x W 5¹/₈" x H 2³/₈"

DUCT DIMENSIONS: L 30" x W 3" x H 2³/₈"

SAFETY STANDARDS: UL / CSA certified by Intertek


RoHS & WEEE DIRECTIVES: Compliant

PACKAGING: 3.4 lbs - L 30" x W 8⁷/₈" x H 2³/₈"


MASTERPACK: 10 pieces



Actual flow rates (GPH)

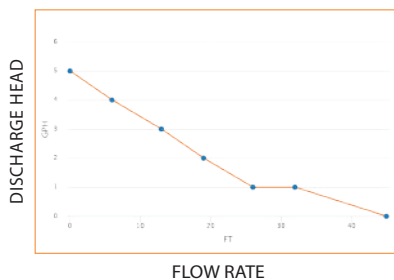

Sound level

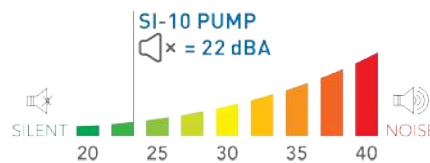

Recommended accessories



Clear PVC hose, 1/4" i.d.
• ACC 00105: 16ft roll • ACC 00150: 164ft roll



Self-sealing fitting to connect discharge tube to drain pipe.
• 6 pcs, for 1/4" i.d.

What's in the box



- Si-10 piston pump with clear pvc tube fitted with a premounted drain safe device
- 5' power cable: 2 power wires, 2 safety contact wires
- Vent tube
- 2-part elbow (base and cover)
- 30" of ductline
- Elbow / Duct gasket
- Rubber elbow / split gasket
- Ceiling duct cover
- 20" flexible hose (for connection to the split)
- 6 screws and plugs and 2 pipe clamps



SCAN THIS QR CODE FOR ADDITIONAL DELTA PACK TECHNICAL INFORMATION